

CHEBOYGAN COUNTY DEPARTMENT OF BUILDING SAFETY

870 South Main Street • P.O. Box 70

Cheboygan, Michigan 49721

Phone: (231) 627-8813 • Fax: (231) 627-8454

www.cheboygancounty.net

PLUMBING HOOKUP HANDOUT FOR SINGLE-WIDE MOBILE HOMES, HUD SECTIONAL HOMES & STATE APPROVED MODULAR HOMES

(REFERENCES: 2009 MICHIGAN RESIDENTIAL CODE)

SEWER LINES

- ◆ Any change in direction - use 45 degree elbows or long sweep 90 degree elbows
- ◆ 4" sewers require 4" cleanouts (3" sewers require 3" cleanouts)
- ◆ When connecting PVC to iron, etc, use the proper adaptor or a Fernco Coupling



Fernco Coupling


- ◆ **DO NOT** glue ABS (black) to PVC (white) pipe, use threaded adaptor or a Fernco Coupling
- ◆ Sewer drain pipe minimum 3", schedule #30 or #40 PVC

HANGERS

Type of Hanger	Distance
PVC	Every 4' (or as close to 4' as possible)
Copper	Every 6' (or as close to 6' as possible)
Plastic (rigid)	Every 3' (or as close to 3' as possible)
Plastic (flexible)	Every 32" (or as close to 32" as possible)

CEMENT BLOCKS, BLOCKING OR LAYING PIPING ON THE GROUND IS PROHIBITED

APPROVED FITTINGS AND THEIR PROPER INSTALLATION

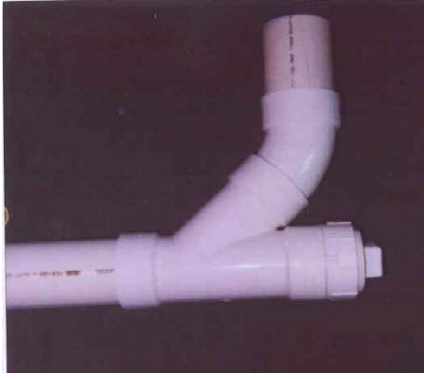

45 Degree with Wye



90 Degree Long Sweep

NOT APPROVED FITTINGS



Sanitary Tee



90 Degree Short Sweep in the Horizontal Position

WATER SUPPLY SYSTEM

- ◆ The minimum size water service pipe shall be 3/4"
- ◆ Service Valve: Each dwelling unit shall be provided with an accessible main shutoff valve. The valve shall be of a full-open type (gate valve or ball valve type)

PLACE AND TIME PERMITS ARE ISSUED: The Cheboygan County Department of Building Safety will normally be open from 8:00 a.m. - 12:00 p.m. & 1:00 p.m. – 4:00 p.m., Monday – Friday. Permits will be issued anytime during work hours. The field inspections will be conducted from 10:00 a.m. to 4:00 p.m.

**INSPECTIONS MUST BE CALLED INTO THE OFFICE 24 HOURS IN ADVANCE
(231) 627-8813**